







# OEM Version Power Supply


## Direct Current (DC) Power supply

	LDD-800D	LDC-1580XP	HPC-1500
<b>Laser Diode Driver</b>			
Driver Current	0-800mA	0-1500mA	0-1500mA
Driver Current Limit	50-800mA	50-1500mA	50-1500mA
Max. Driver Voltage		3.0V	3.0V
TTL Modulation		DC-10KHZ	DC-10KHZ
<b>Temperature Control</b>			
Max. Driver Current	<b>Not Included</b>	2A	2A
Max. Driver Voltage		8V	Vs-2.6V
Temperature Sensor		10Kohm NTC Thermistor	10Kohm NTC Thermistor
<b>General Specifications</b>			
Dimension(mm)	60(W)x20(H)x75(L)	83(W)x40(H)x136(L)	120(W)x32.5(H) x 66(L)
Operating Temperature, Case	-10°C ~ +60°C	-10°C ~ +60°C	-10°C ~ +60°C
Operating Voltage	+5VDC	+12VDC	+5VDC

### LDD-800D



### LDC-1580XP

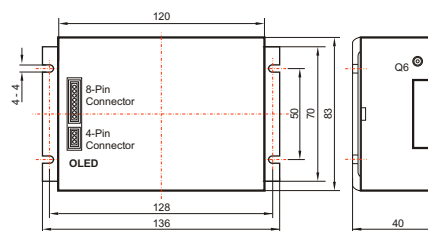

### HPC-1500

